



FILO


THE QUICK-CHANGE ARTIST

Aluminium, white slate or black, glass or rust effects: The clear cubic shape of the FILO can be adapted to almost any interior design with a whole range of different side panels.

Being the entry level model for the touchscreen display the Filo can be controlled by state-of-the-art electronics with WIFI through the use of Rika firenet.



Dimensions



Heat range



Room air independent



Touch screen



WIFI



Large hopper



Rust effect



Rust effect - Metallic



Black slate



White slate



Black steel



Black decorative glass

Features



Wifi included




40kg pellet hopper



Peace and quiet thanks to the quiet auger system

TECHNICAL SPECS

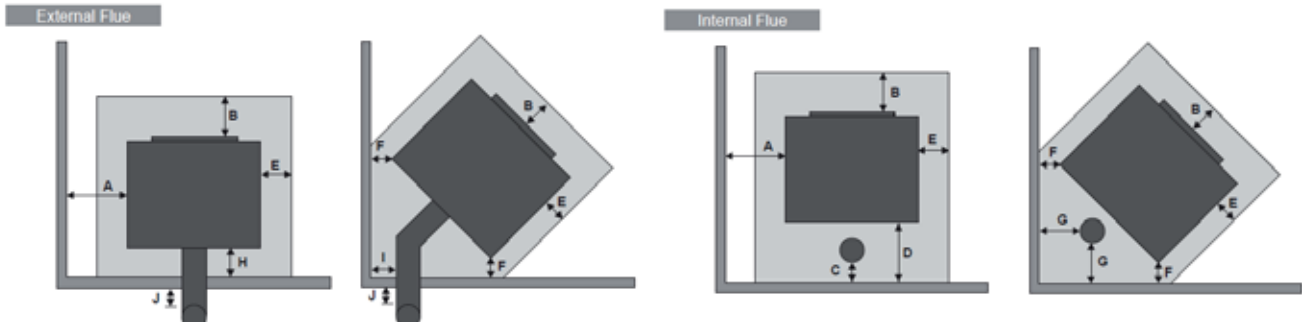

	Unit of Measure	FILO
Clearances		
<i>Flat Wall Install</i>		
Side clearance (A)	mm	100
Front hearth clearance (B)	mm	150
Flue clearance (C)*	mm	50
Rear clearance (D)*	mm	~200
Side hearth clearance (E)	mm	0
<i>Corner Install</i>		
Side clearance (F)	mm	100
Flue clearance (G) *	mm	50
<i>External Flue</i>		
Rear clearance (H)	mm	100
Side flue clearance (I)*	mm	50
Outside flue clearance (J)*	mm	25
Minimum Hearth Depth		
<i>Flat Wall Install</i>		
Rear wall to front of hearth	mm	950
<i>Corner Install</i>		
Apex of wall to front of hearth	mm	1100

	Unit of Measure	FILO
Fire Dimensions		
Height	mm	1070
Width	mm	520
Depth	mm	585
Weight	kg	195
Technical Data		
Heating Range	kW	~2.4 to ~8.2
Fuel Consumption	kg/hr	~0.6 to ~1.9
Hopper Capacity	kg	40
Hopper Burn Time (High)	hr	up to ~21
Hopper Burn Time (Low)	hr	up to ~66
Electric Supply	V/Hz	230/50
Average Electrical Input	W	~20
Ignition Electrical Input	W	~150
Fuse	A	2.5AT
Efficiency (Nett)	%	88
Emissions	mg/MJ	15
Emissions (g/kg)	g/kg	0.27
Fresh Air Requirement	m3/hr	~20

* From shielded flue

Note: These are minimum clearances to combustibles. Actual installation distances may be greater.

We recommend 200mm rear clearance and 300mm side clearance to allow for servicing access.

Your RIKA Dealer

Eenergy
The Pellet Fire Shop