



SOAP
STONE



SAND
STONE



DECOR
WHITE



DECOR
WOOD



**EXTREMELY
QUIET**



**TOUCH
SCREEN**



**WIFI
OPTION**

Colour options subject to stock availability

DOMO


**HIGH TECH
PERFECT IN FORM**

.....


DOMO is as persuasive on the inside as it is on the outside: Behind its beautiful form, you can find all of our innovations such as the electronic door opening, the extra large pellet container, the automatic tipping-grate ash-disposal and lots more. It is the “best of RIKA” – combined in one fire.

TECHNICAL SPECS

External Flue

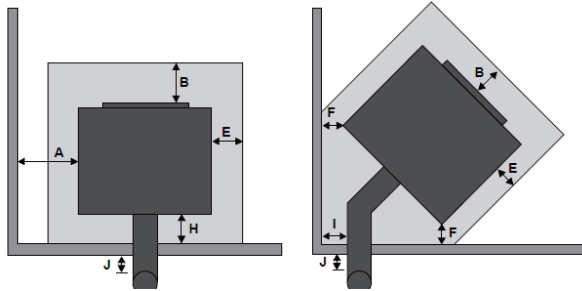

Internal Flue

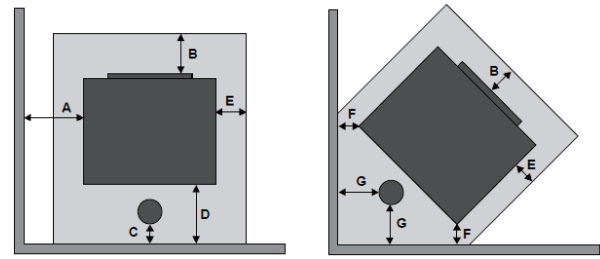

	Unit of Measure	DOMO
Clearances		
<i>Flat Wall Install</i>		
Side clearance (A)	mm	100
Front hearth clearance (B)	mm	150
Flue clearance (C)*	mm	25
Rear clearance (D)*	mm	~200
Side hearth clearance (E)	mm	0
<i>Corner Install</i>		
Side clearance (F)	mm	100
Flue clearance (G) *	mm	25
<i>External Flue</i>		
Rear clearance (H) **	mm	100
Side flue clearance (I)*	mm	25
Outside flue clearance (J)*	mm	25

	Unit of Measure	DOMO
Fire Dimensions		
Height	mm	1120
Width	mm	793
Depth	mm	431
Weight (Stones / Decor)	kg	~230 / 185
Technical Data		
Heating Range	kW	~3 to ~10.2
Fuel Consumption	kg/hr	~0.7 to ~2.3
Hopper Capacity	kg	~50
Hopper Burn Time (High)	hr	up to ~21
Hopper Burn Time (Low)	hr	up to ~71
Electric Supply	V/Hz	230/50
Average Electrical Input	W	~20
Ignition Electrical Input	W	~150
Fuse	A	2.5AT
Efficiency (Nett)	%	89
Emissions	mg/MJ	16
Emissions (g/kg)	g/kg	0.30
Fresh Air Requirement	m3/hr	~20

* From shielded flue. Clearances are to be taken from the nearest combustible surface. Please take into account skirting, scotia, cornices and roof timbers.

** The rear clearance is a minimum clearance to combustibles. For servicing and maintenance access we recommend a minimum of 130 - 140mm rear clearance.

NOTE: We recommend getting hearth dimensions and clearances confirmed by an installer.

Your RIKA Dealer

Eenergy
The Pellet Fire Shop