



REVO II

**PRETTY AS A PICTURE
SIMPLY ELEGANT**

.....

Simplicity is the essence of elegance. Our REVO II pellet fire is the most beautiful proof of this. Modest, aesthetic forms surrounded by strong natural stone. Punching out up to 8.4kW of radiant heat but with very little noise.



SOAP
STONE



SAND
STONE



**EXTREMELY
QUIET**



**TOUCH
SCREEN**




**WIFI
OPTION**

Colour options subject to stock availability




TECHNICAL SPECS

External Flue

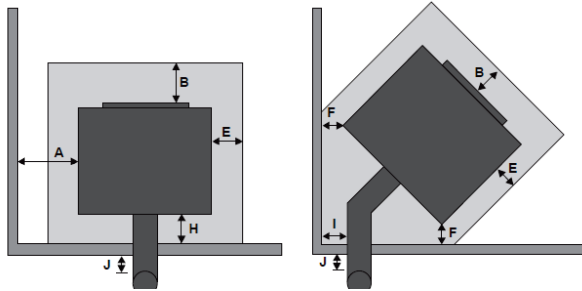

Internal Flue

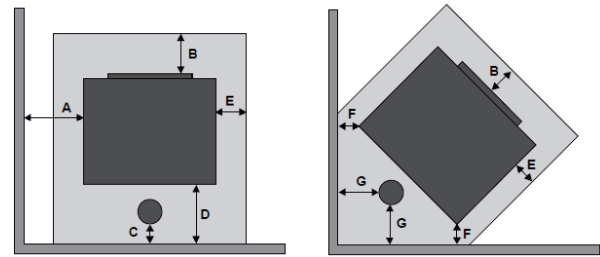

	Unit of Measure	REVO II
Clearances		
<i>Flat Wall Install</i>		
Side clearance (A)	mm	100
Front hearth clearance (B)	mm	150
Flue clearance (C)*	mm	25
Rear clearance (D)*	mm	~200
Side hearth clearance (E)	mm	0
<i>Corner Install</i>		
Side clearance (F)	mm	100
Flue clearance (G) *	mm	25
<i>External Flue</i>		
Rear clearance (H) **	mm	100
Side flue clearance (I)*	mm	25
Outside flue clearance (J)*	mm	25

	Unit of Measure	REVO II
Fire Dimensions		
Height	mm	1090
Width	mm	532
Depth	mm	578
Weight (Steel)	kg	225
Technical Data		
Heating Range	kW	~2.5 to ~8.4
Fuel Consumption	kg/hr	~0.6 to ~1.9
Hopper Capacity	kg	~39
Hopper Burn Time (High)	hr	up to ~20
Hopper Burn Time (Low)	hr	up to ~65
Electric Supply	V/Hz	230/50
Average Electrical Input	W	~20
Ignition Electrical Input	W	~150
Fuse	A	2.5AT
Efficiency (Nett)	%	86
Emissions	mg/MJ	21
Emissions (g/kg)	g/kg	0.38
Fresh Air Requirement	m3/hr	~20

* From shielded flue. Clearances are to be taken from the nearest combustible surface. Please take into account skirting, scotia, cornices and roof timbers.

** The rear clearance is a minimum clearance to combustibles. For servicing and maintenance access we recommend a minimum of 130 - 140mm rear clearance

NOTE: We recommend getting hearth dimensions and clearances confirmed by an installer.

Your RIKA Dealer

Eenergy
The Pellet Fire Shop