



COMO II

A POWERFUL COMPOSITION

A dark body surrounded by pale stone skilfully sets the scene for the fire.

Minimalistic, simple, and yet distinctive: COMO II is an aesthetic that will never get old. The broad, gentle play of the flames is exceptionally quiet, and body is available with high-quality side panels

SOAP
STONE

WHITE
STONE

EXTREMELY
QUIET

TOUCH
SCREEN


WIFI
OPTION

Colour options subject to stock availability


 **RIKA**[®]

TECHNICAL SPECS

External Flue

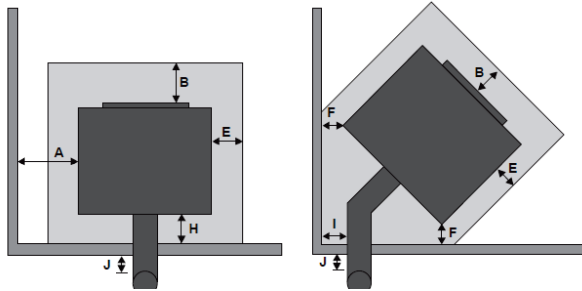

Internal Flue

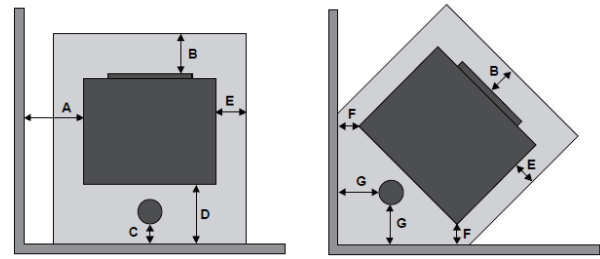

	Unit of Measure	COMO II
Clearances		
<i>Flat Wall Install</i>		
Side clearance (A)	mm	100
Front hearth clearance (B)	mm	150
Flue clearance (C)*	mm	25
Rear clearance (D)*	mm	~200
Side hearth clearance (E)	mm	0
<i>Corner Install</i>		
Side clearance (F)	mm	100
Flue clearance (G)*	mm	25
<i>External Flue</i>		
Rear clearance (H)**	mm	100
Side flue clearance (I)*	mm	25
Outside flue clearance (J)*	mm	25

	Unit of Measure	COMO II
Fire Dimensions		
Height	mm	1033
Width	mm	505
Depth	mm	556
Weight (Steel)	kg	225
Technical Data		
Heating Range	kW	~2.5 to ~8.4
Fuel Consumption	kg/hr	~0.6 to ~1.9
Hopper Capacity	kg	~33
Hopper Burn Time (High)	hr	up to ~17
Hopper Burn Time (Low)	hr	up to ~55
Electric Supply	V/Hz	230/50
Average Electrical Input	W	~20
Ignition Electrical Input	W	~150
Fuse	A	2.5AT
Efficiency (Nett)	%	86
Emissions	mg/MJ	21
Emissions (g/kg)	g/kg	0.38
Fresh Air Requirement	m3/hr	~20

* From shielded flue. Clearances are to be taken from the nearest combustible surface. Please take into account skirting, scotia, cornices and roof timbers.

** The rear clearance is a minimum clearance to combustibles. For servicing and maintenance access we recommend a minimum of 130 - 140mm rear clearance

NOTE: We recommend getting hearth dimensions and clearances confirmed by an installer.

Your RIKA Dealer

Eenergy
The Pellet Fire Shop