




# COMO


## A QUIET PRESENCE

The COMO is remarkable in two ways. On the one hand, it is one of the quietest pellet fires on the market. On the other, its various casing and colour options allow you to customise its appearance for a look that suits you perfectly.

## Other colours



Dimensions



Heat range



Room air independent



Touch screen



WIFI



Large hopper

## Features




Large 34kg pellet hopper



Peace and quiet thanks to the quiet auger system

# TECHNICAL SPECS

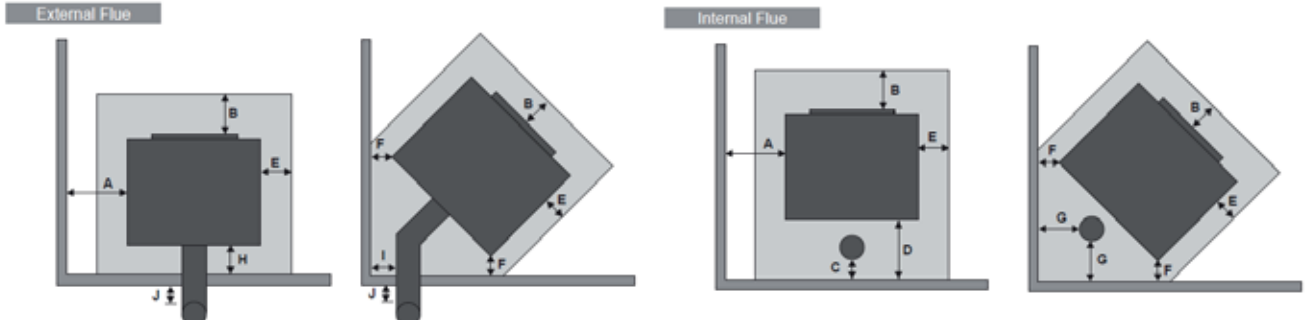

	Unit of Measure	COMO
<b>Clearances</b>		
<i>Flat Wall Install</i>		
Side clearance (A)	mm	200
Front hearth clearance (B)	mm	150
Flue clearance (C)*	mm	50
Rear clearance (D)	mm	200
Side hearth clearance (E)	mm	0
<i>Corner Install</i>		
Side clearance (F)	mm	200
Flue clearance (G) *	mm	50
Rear clearance (H)	mm	200
<i>External Flue</i>		
Side flue clearance (I)*	mm	50
Outside flue clearance (J)*	mm	25
<b>Minimum Hearth Depth</b>		
<i>Flat Wall Install</i>		
Rear wall to front of hearth	mm	910
<i>Corner Install</i>		
Apex of wall to front of hearth	mm	1255

	Unit of Measure	COMO
<b>Fire Dimensions</b>		
Height	mm	990
Width	mm	520
Depth	mm	560
Weight	kg	228
<b>Technical Data</b>		
Heating Range	kW	~2.4 to ~9
Fuel Consumption	kg/hr	~0.6 to ~2.2
Hopper Capacity	kg	34
Hopper Burn Time (High)	hr	up to ~15
Hopper Burn Time (Low)	hr	up to ~57
Electric Supply	V/Hz	230/50
Average Electrical Input	W	~20
Ignition Electrical Input	W	~150
Fuse	A	2.5AT
Efficiency (Nett)	%	87
Emissions	mg/MJ	10
Emissions (g/kg)	g/kg	0.2
Fresh Air Requirement	m3/hr	~20

\* From shielded flue

Note: These are minimum clearances to combustibles. Actual installation distances may be greater.

We recommend 200mm rear clearance and 300mm side clearance to allow for servicing access.

Your RIKA Dealer

**Eenergy**  
The Pellet Fire Shop