



Soapstone

REVO


UNDERSTATED TECHNICAL PERFECTION

The REVO combines a simple, minimalist design, strong on natural stone with a large pellet hopper.

Available in Sandstone or Soapstone finishes.



Dimensions



Heat range



Room air independent



Touch screen



Wifi



Large hopper



Sandstone

Features



Wifi included



34 kg pellet hopper



Peace and quiet thanks to the quiet auger system


SURFACES

SANDSTONE VERSIONS

Please note that the stone surrounds on RIKA fires are all natural products. Each stone is unique, making your fire one of a kind. It is therefore not possible to order a specific stone texture.



TECHNICAL SPECS

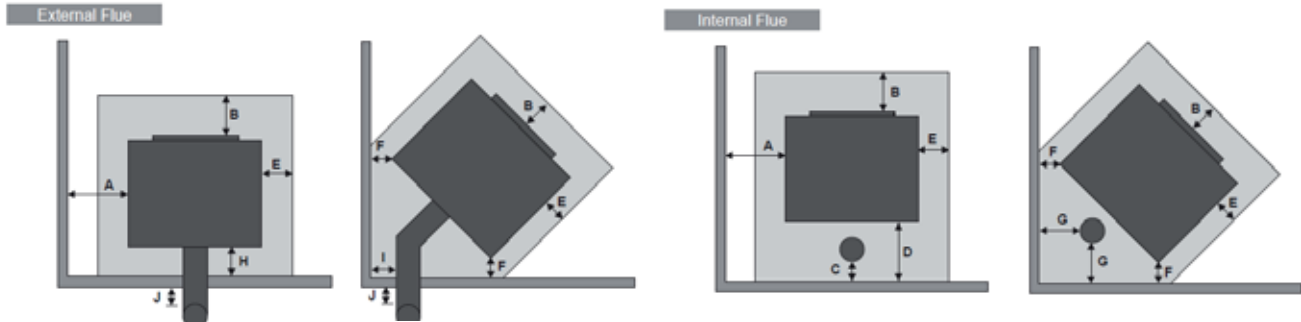

	Unit of Measure	REVO
Clearances		
<i>Flat Wall Install</i>		
Side clearance (A)	mm	200
Front hearth clearance (B)	mm	150
Flue clearance (C)*	mm	50
Rear clearance (D)	mm	200
Side hearth clearance (E)	mm	0
<i>Corner Install</i>		
Side clearance (F)	mm	200
Flue clearance (G) *	mm	50
Rear clearance (H)	mm	200
<i>External Flue</i>		
Side flue clearance (I)*	mm	50
Outside flue clearance (J)*	mm	25
Minimum Hearth Depth		
<i>Flat Wall Install</i>		
Rear wall to front of hearth	mm	960
<i>Corner Install</i>		
Apex of wall to front of hearth	mm	1305

	Unit of Measure	REVO
Fire Dimensions		
Height	mm	1038
Width	mm	520
Depth	mm	606
Weight	kg	237
Technical Data		
Heating Range	kW	~2.4 to ~9
Fuel Consumption	kg/hr	~0.6 to ~2.2
Hopper Capacity	kg	40
Hopper Burn Time (High)	hr	up to ~20
Hopper Burn Time (Low)	hr	up to ~67
Electric Supply	V/Hz	230/50
Average Electrical Input	W	~20
Ignition Electrical Input	W	~150
Fuse	A	2.5AT
Efficiency (Nett)	%	87
Emissions	mg/MJ	10
Emissions (g/kg)	g/kg	0.2
Fresh Air Requirement	m3/hr	~20

* From shielded flue Note: These are minimum clearances to combustibles. Actual installation distances may be greater. We recommend 200mm rear clearance and 300mm side clearance to allow for servicing access.

Your RIKA Dealer

Eenergy
The Pellet Fire Shop